

May, 2003


## 3M™ Scotch® Packing List Pouch Tape 829

### Product Description

Scotch® Packing List Pouch Tape 829 is a pressure-sensitive tape with a red border framing a non-sticky, clear, rectangular center window, which allows attaching and protecting of packing lists and other documents to boxes and shipping containers.

### Product Features

- Clear with red border and standard message: "Packing List Enclosed" and "Cut Here" printed near cross-web dots (dispense line).
- Adheres instantly to a variety of surfaces.
- Edge tear and split resistance.
- Good adhesion to fiberboard.
- Complies with the environmental considerations of ASTM D 1974.
- Strong film cover protects documents from weather or abrasion.
- Read-through of enclosed documents.
- Fast application saves time.
- Keeps packing list or label securely with the package.
- Conformable backing.

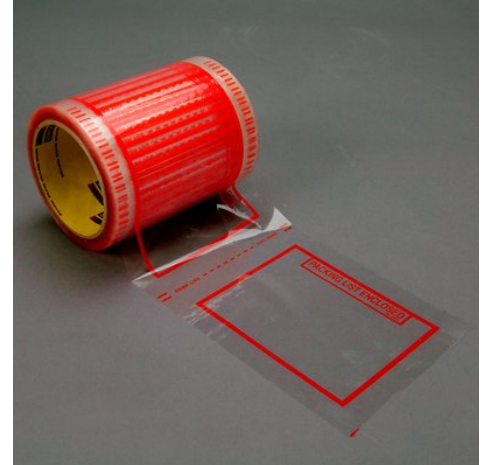

## Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

## Typical Physical Properties

Property	Values		Method	Notes
Color	Clear with red print			
Total Tape Thickness	0.051 mm	1.9 mil	ASTM D3652	
Backing Thickness	0.03 mm	1.2 mil	ASTM D3652	
Backing	Biaxially oriented polypropylene film			
Adhesive	Pressure sensitive hot melt rubber-resin			
Holding Power to Fiberboard	3,000+ min		ASTM D3654	Valid only for border area, not window.

## Typical Performance Characteristics

Property	Values		Method	Substrate	Notes
Peel Adhesion	4.4 N/cm	40 oz/in	ASTM D3330	Steel	Valid only for border area, not window.
Elongation at Break	160 %		ASTM D3759		

Tensile Strength		Test Condition
38.5 N/cm	22 lb/in	Machine Direction
77.1 N/cm	44 lb/in	Cross Direction

Property: Tensile Strength  
Method: ASTM D3759

## Available Sizes

Property	Values
Standard Roll Sizes	333 pouches per roll
Product Size	5 in x 8 in

## Storage and Shelf Life

Store in a clean, dry place. Temperature of 40-80°F (4-26°C) and 40-50% relative humidity are recommended.

## References

Property	Values
3m.com Product Page	<a href="https://www.3m.com/3M/en_US/company-us/all-3m-products/-/Scotch-Pouch-Tape-Rolls-829?N=5002385+3293162066&amp;rt=rud">https://www.3m.com/3M/en_US/company-us/all-3m-products/-/Scotch-Pouch-Tape-Rolls-829?N=5002385+3293162066&amp;rt=rud</a>
Safety Data Sheet (SDS)	<a href="https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&amp;msdsLocale=en_US&amp;co=ptn&amp;q=829">https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&amp;msdsLocale=en_US&amp;co=ptn&amp;q=829</a>

## ISO Statement

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001 standards.

## For Additional Information

To request additional product information or to arrange for sales assistance, call toll free 1-800-362-3550 or visit [www.3M.com/packaging](http://www.3M.com/packaging). Address correspondence to: 3M Industrial Adhesives and Tapes Division, Building 21-1W-10, 900 Bush Avenue, St. Paul, MN 55144-1000. Our fax number is 651-778-4244. In Canada, phone: 1-800-364-3577. In Puerto Rico, phone: 1-787-750-3000. In Mexico, phone: 52-70-04-00.

## Information

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



3M United States  
3M Center  
St. Paul, MN 55144-1000  
800-362-3550  
[www.3M.com](http://www.3M.com)

Please recycle.  
© 3M 2020. All Rights Reserved.

The brands listed above are trademarks of 3M